


PRODUCT SHEET

Plastic pull tight seal

ES 413

Type of seal	pull tight	
Security level	indicative	
Seal body material	PP - Polypropylene	
Seal insert material	steel	
Tension strength	230 N (23 kg)	
Operating temperature	-40°C to +50°C	
Total length	490 mm	
Operating length	400 mm	
Diameter of application hole	4 mm	
Method of application	manual, no tools needed	
Method of removal	simple cutting tool	
Technology of marking	thermoprinting (standard), hot stamping (optional)	
Marking	Text	YES
	Logo	YES
	Numbering	YES
	Bar code	YES
Remarks to marking	Hot stamping does not allow marking of barcode. Thermoprinting is not suitable for chemically aggressive environments (thinners, solvents, gasoline).	
Colors	white, yellow, orange, red, blue, green, black	
Packing	10 pcs in mat, 10 mats in PE bag, 2 000 pcs in carton, carton weight 14 kg	
Use	Sealing of cash bags, postal bags, trucks, cistern tank valves, gates, various closures etc.	

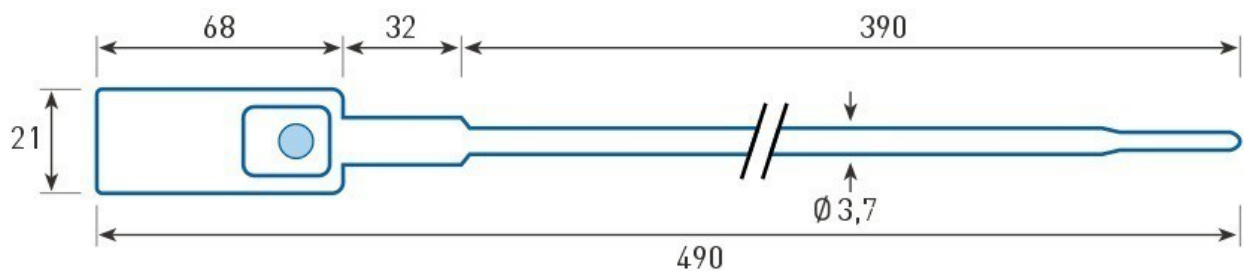

Dimensions are given in mm